


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

P0292

**WARNING:** TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

**NOTES:** 1. Before installing, consult local electrical codes for wiring and grounding requirements.  
2. READ AND SAVE THESE INSTRUCTIONS.

## Hardware Package (included):

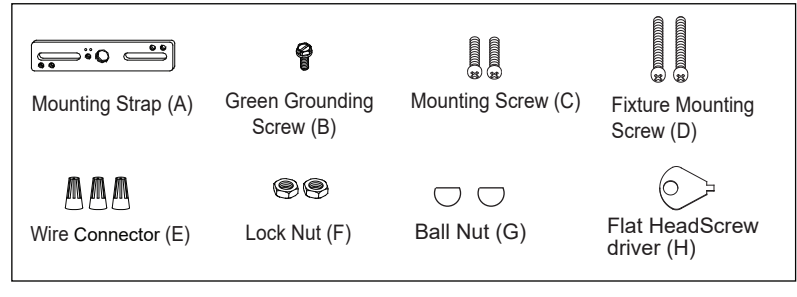


## Installation Steps

Turn off the power at fuse or circuit box.


1. Thread two fixture mounting screws (D) to the mounting strap (A), then secure them with two lock nuts (F).
2. Adjust the length of cord with strain relief to achieve the desired height.
3. Depending on the desired height of light fixture, you may need to cut the excess wire. You will need at least 9 inches of wire to work with. Prepare wire by stripping 3/8 in of insulation from wire ends using wire strippers (not included).
4. Attach the mounting strap (A) to outlet box by using two mounting screws (C).
5. --- Connect the L wire from the fixture to the black wire from the power source.  
--- Connect the N wire from the fixture to the white wire from the power source.  
--- Connect the BARE/GREEN ground wire from outlet box to BARE wire from fixture using wire connector.  
--- Connect put the wires back into the outlet box.
6. Attach the fixture canopy to the mounting strap (A) by inserting the fixture mounting screw (D), and then secure it with two ball nuts (G).
7. Pull the cord (A) down slightly until the strain relief touches the hex nut.  
**Note: Adjusting the strain relief of the canopy can decrease or increase the length of cord that is exposed.**
8. Attach the fixture canopy to the mounting strap by inserting the fixture mounting screws, then secure it with two ball nuts.
9. Install a bulb Max.60W (not included).

Turn on the power at fuse or circuit box.

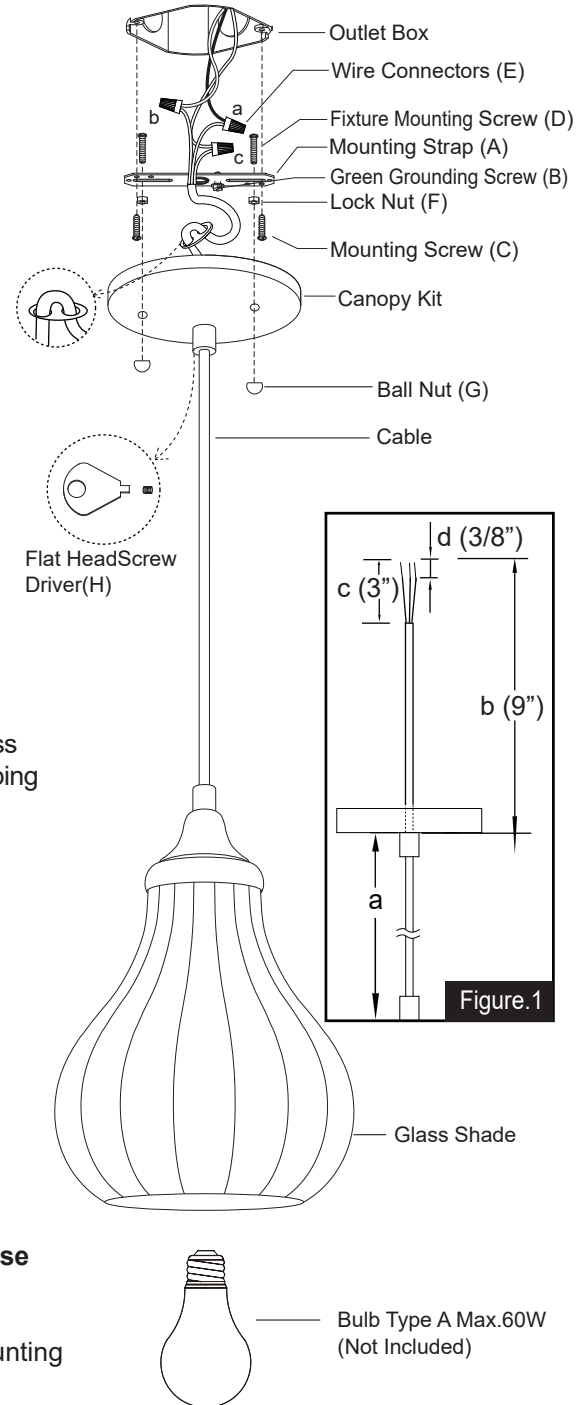


The following parts are available for re-order if damaged or missing.


**Spare Parts List:**

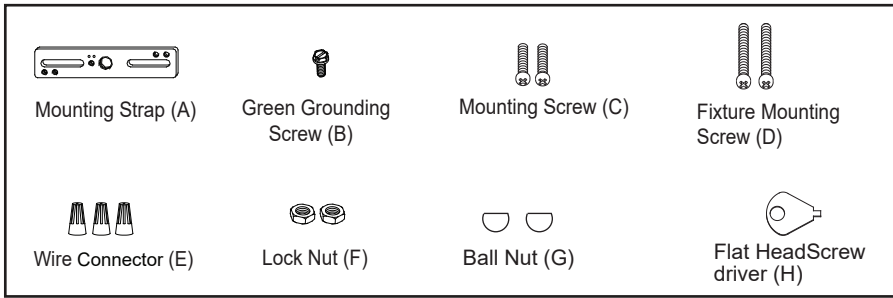

→ Assembly Kit  
6019MM (1SET)



Glass  
10044MG

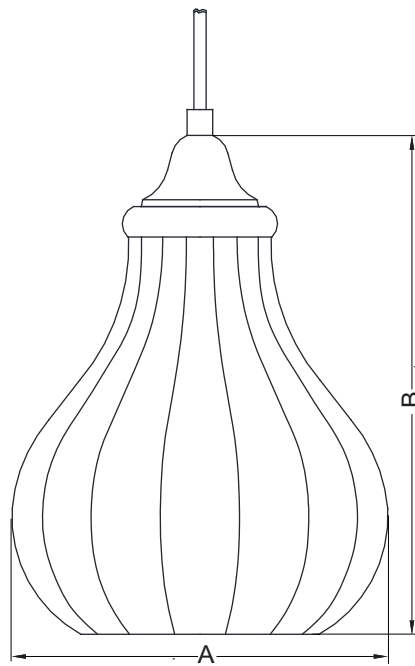

A: 7-1/2"

B: 9-1/2"