


# ASSEMBLY AND INSTALLATION INSTRUCTIONS

T0289

**WARNING: BE SURE TO SHUT OFF POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE INSTALLING OR SERVICING THIS FIXTURE.**

**NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements. 2. READ AND SAVE THESE INSTRUCTIONS.**


## Hardware Package (included):

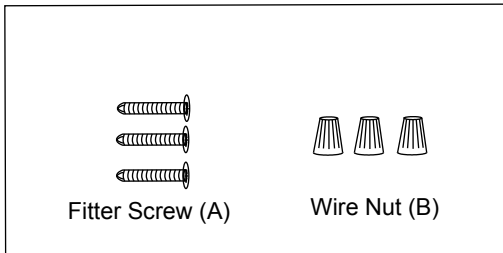

## Installation Steps

Turn off the power at fuse or circuit box.

1. Unscrew the roundhead screws and flathead screws to remove the handle from the cover assembly and to remove the cover assembly from the fixture body.
2. Place the socket tubes onto the sockets to cover the sockets completely.
3. Install bulbs (not included). See relamping label at socket area or packaging for maximum allowed wattage.
4. Restore the handle and cover assembly to the fixture body by the roundhead screws and flathead screws.
5. Unscrew the fitter screws to remove the fixture body away from the fitter.
6. Pull out the wires and grounding wire from the post. Make wire connections using the wire nuts:
  - The black wire from the fixture to the black wire from the post.
  - The white wire from the fixture to the white wire from the post.
  - The grounding wire from the fixture to the grounding wire from the post.Carefully put the wires back into the post.

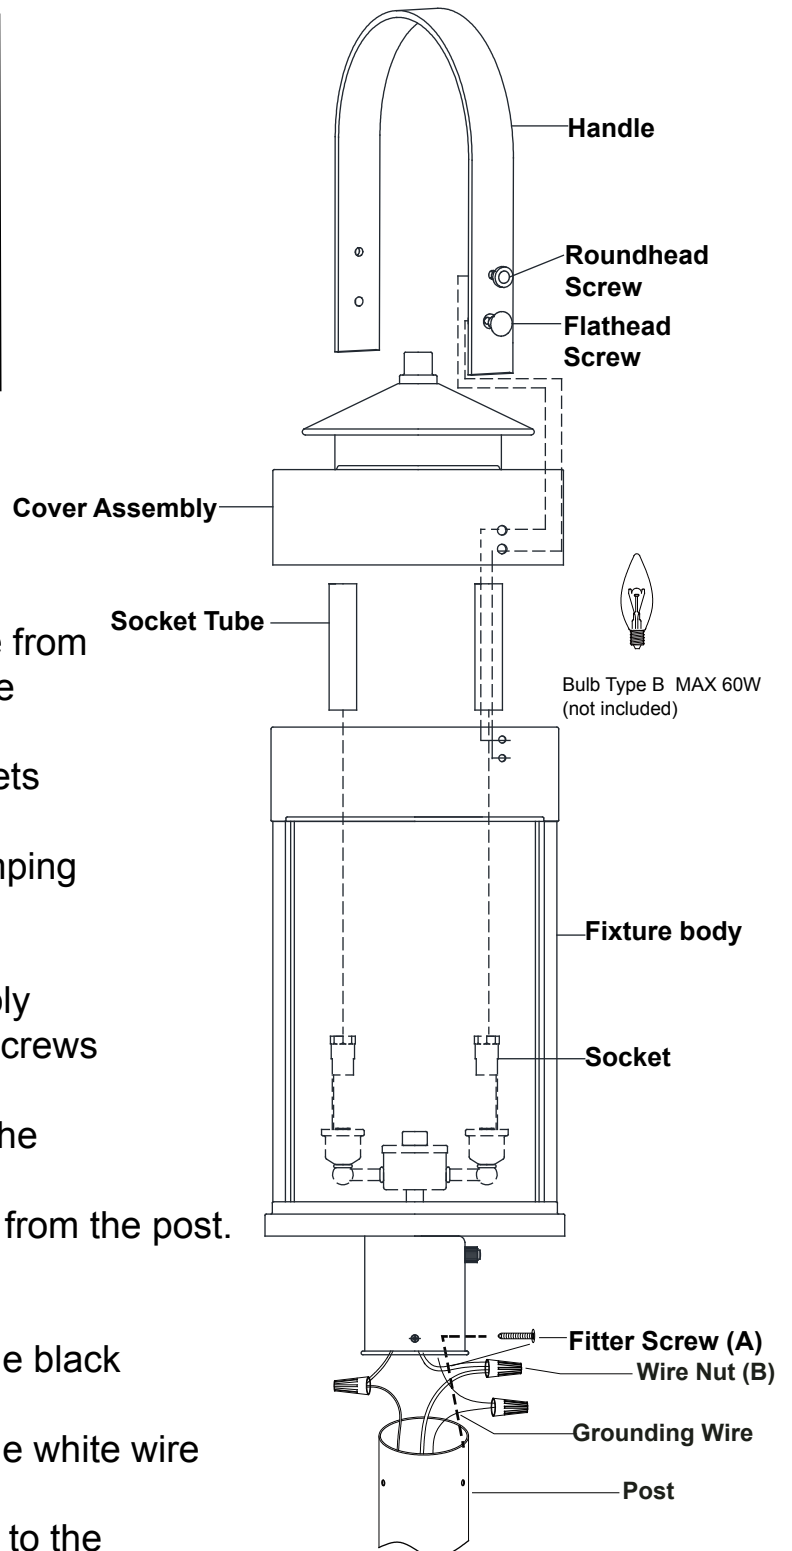

 **VAXCEL**

161006



8. Place the fitter on the top of the post, and then secure it with fitter screws.

**CAUTION: With silicone caulking compound, caulk completely around where the fitter meets with the post surface to prevent water from seeping into the post.**

9. Turn on the power at the main fuse or circuit breaker box.



Turn on the power at fuse or circuit box

## Operation the Unit Without Photocell

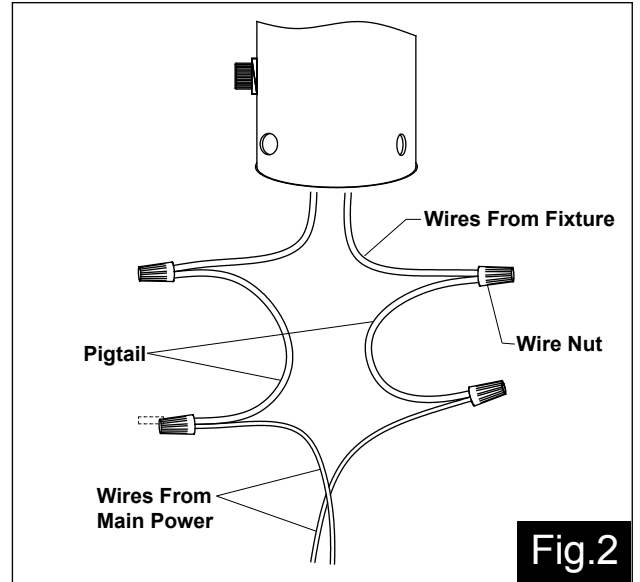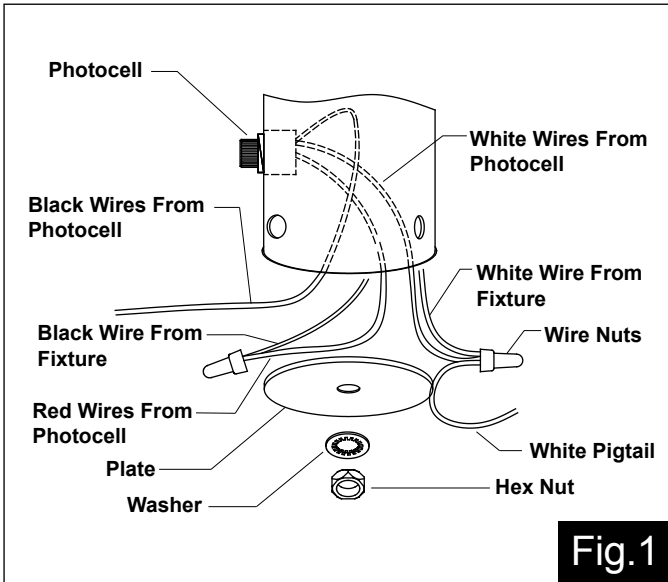

1. Turn off the power at fuse or circuit box before starting installation.
2. Unscrew the hex nut and washer to remove the plate from the fixture.
2. Loosen the wire nuts connected with the wires from photocell. (See Fig.1)
  - Note: Do not move the photocell to prevent water from seeping into the post.**
3. Take a white pigtail and black pigtail and make wire connections using wire nuts: (See Fig.2)
  - a. The black wire from the fixture to one end of the black pigtail.
  - b. The white wire from the fixture to one end of the white pigtail.
  - c. The other end of the black pigtail to the black wire from the power source.
  - d. The other end of the white pigtail to the white wire from the power source.
 Put all wires back into the post.

The following parts are available for re-order if damaged or missing.

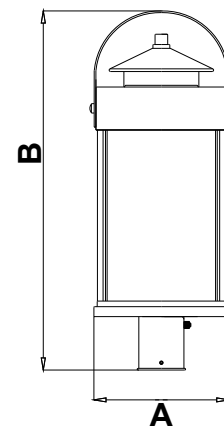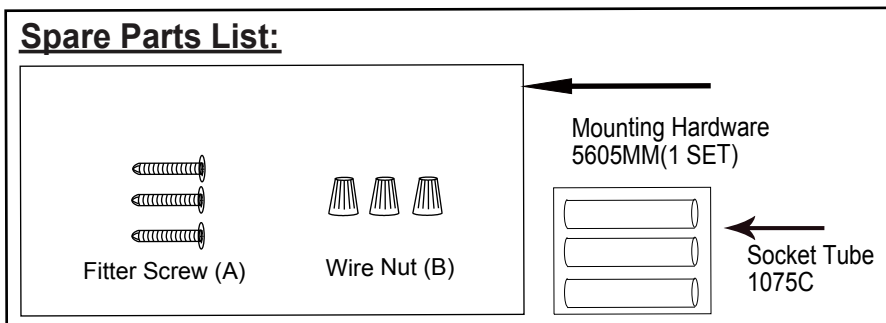

A: 10"  
B: 25"